Fig. 1

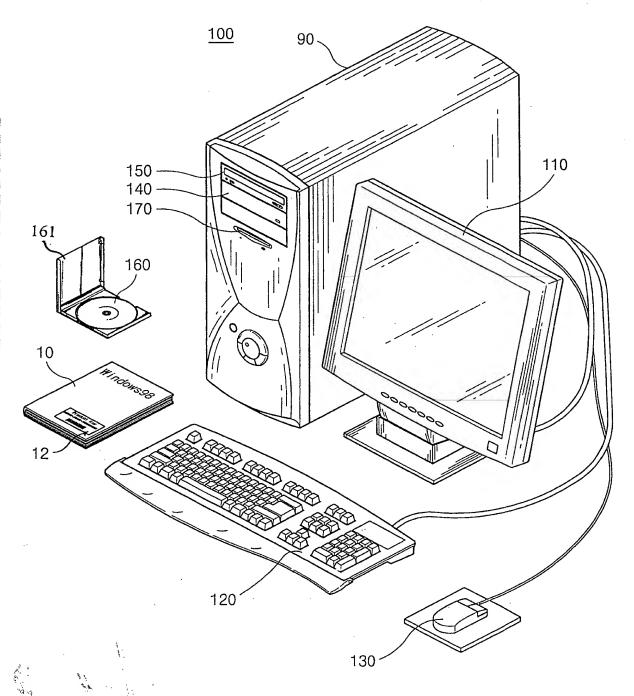
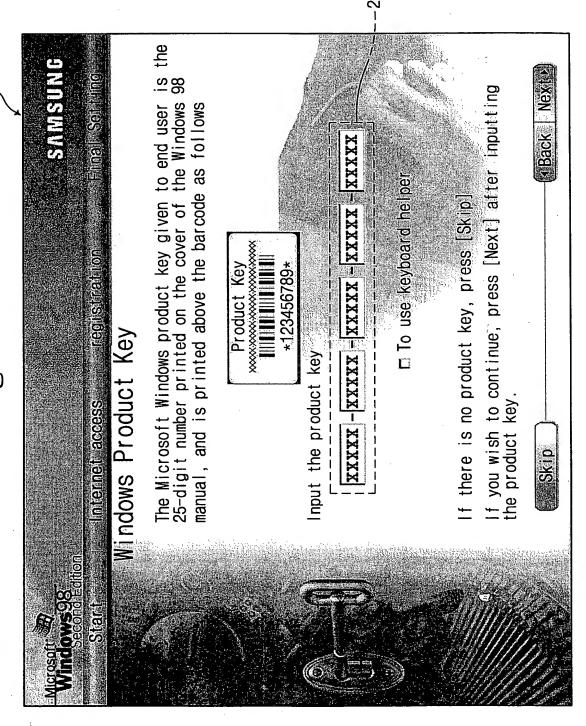


Fig. 2



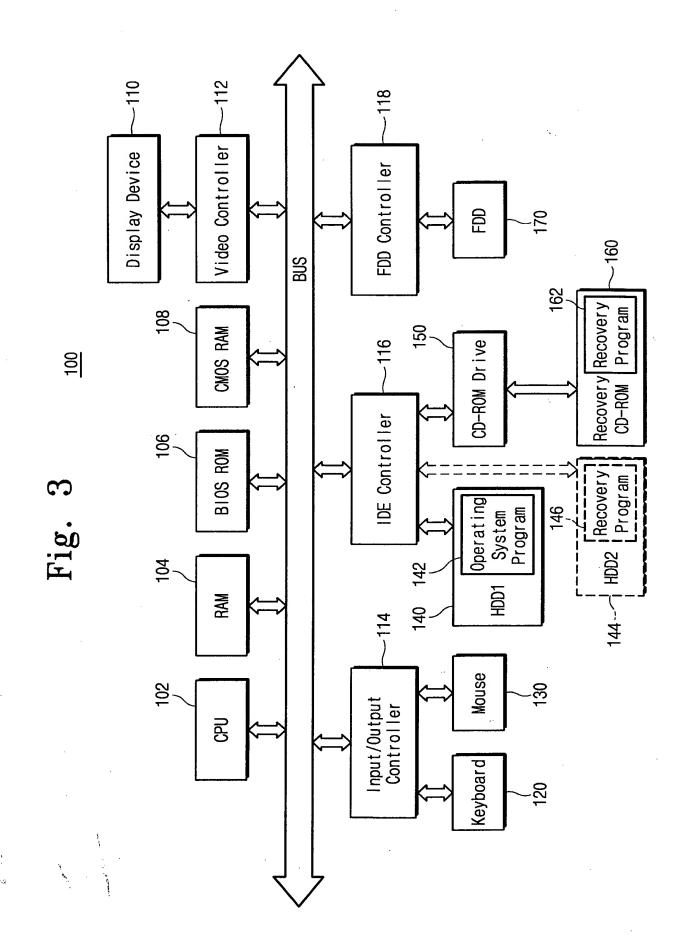


Fig. 4

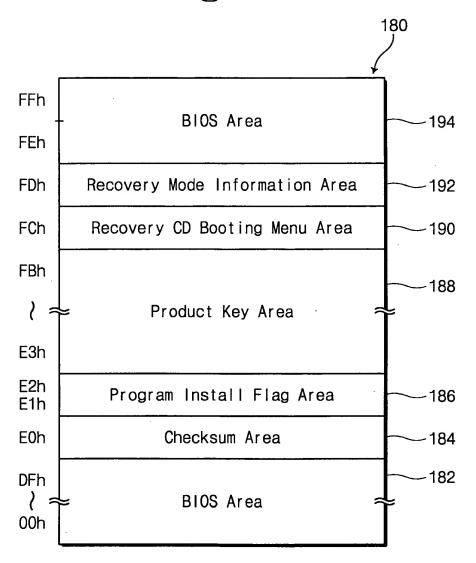


Fig. 5

186a

1 Byte	e Code	Contonto
bit7~bit4	bit3~bit0	Contents
X	0h	Not installed
Х	1h	Installation Of A First Program
X	2h ¹	Installation Of A Second Program
•	•	•
X	Fh	•
0h	Х	A First Format Of Product Key
1h	X	A Second Format Of Product Key
2h	· X	A Third Format Of Product Key
:	:	•
Fh	Х	•

Fig. 6

188a

Address	Input Characters	1 Byte(ASCII) Code
FBh	4	0011 0100
FAh	3	0011 0011
	•	:
•	•	•
E5h	Н	0100 1000
E4h	В	0100 0010
E3h	В	0100 0010

Fig. 7


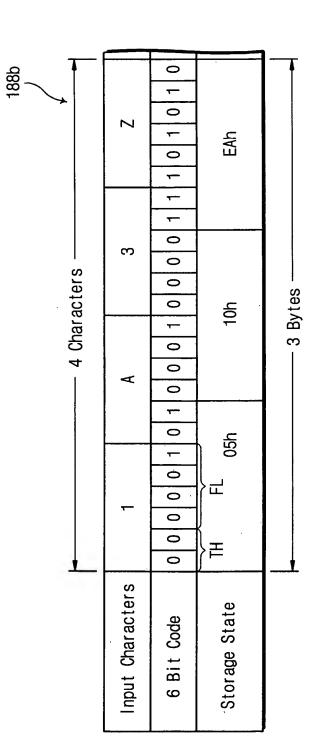


Fig. 8

FL (4-Bit)	9	£	원	1h 2h 3h	4h 5h	51	69	7h	-88	<u>6</u>	Ah	Ah Bh Ch Dh Eh	G G	DH CH		뮤
υO	0	~ ~	2	က	4	5	9	/	8	6			٧	Ш	٨	¢.
#	(B)	A	മ	ပ	۵	ш	Ш	9	工	_	٦	×	T	W	N	0
2h	۵	O ·	~	S	 	⊃	M /	*	×	\	7		/		<	1
3h							Ť	sser.	Reservation	пс						

200

Fig. 9

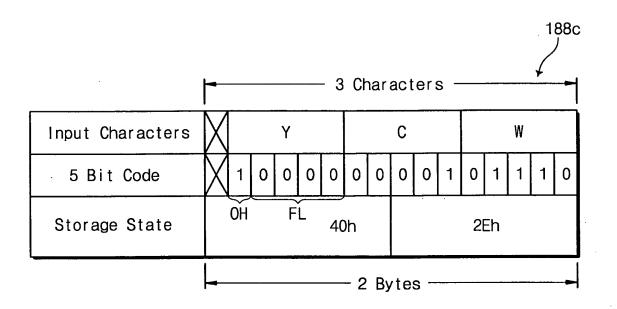

ig. 10

FL (4-Bit)		†	2h	0h 1h 2h 3h 4h	4h	5h	6	7h	8h 9h Ah Bh Ch Dh Eh	9	Ah	Bh	ch Ch	Dh	Eh	F
Oh	В	3	a	4	G	H	Ŋ	×	×	٩	Q	R	_	>	W	×
1h	\	2	3	4	6	7	. 8	6			Ä	Reservation	/at i c	u.		

25

Fig. 11

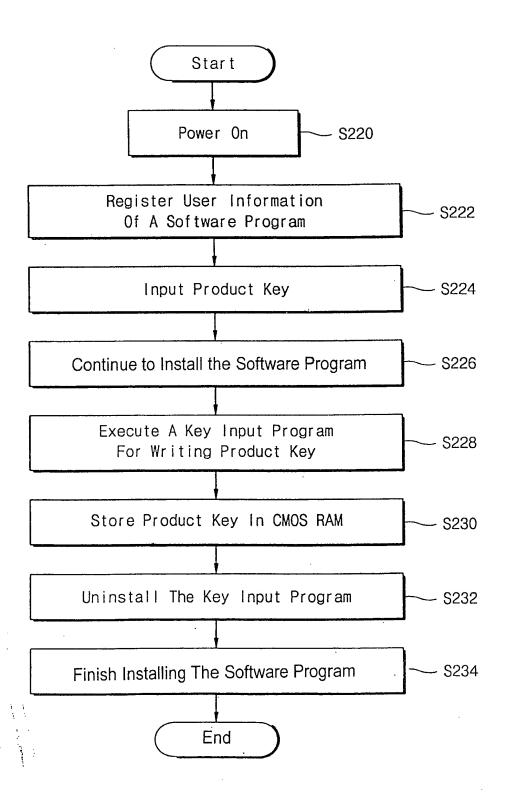


Fig. 12

